


一体化抽湿烫台系列 | VACUUM IRONING TABLE INBUILT WITH STEAM GENERATOR SERIES

VACUUM IRONING TABLE INBUILT WITH STEAM GENERATOR SERIES | 一体化抽湿烫台系列

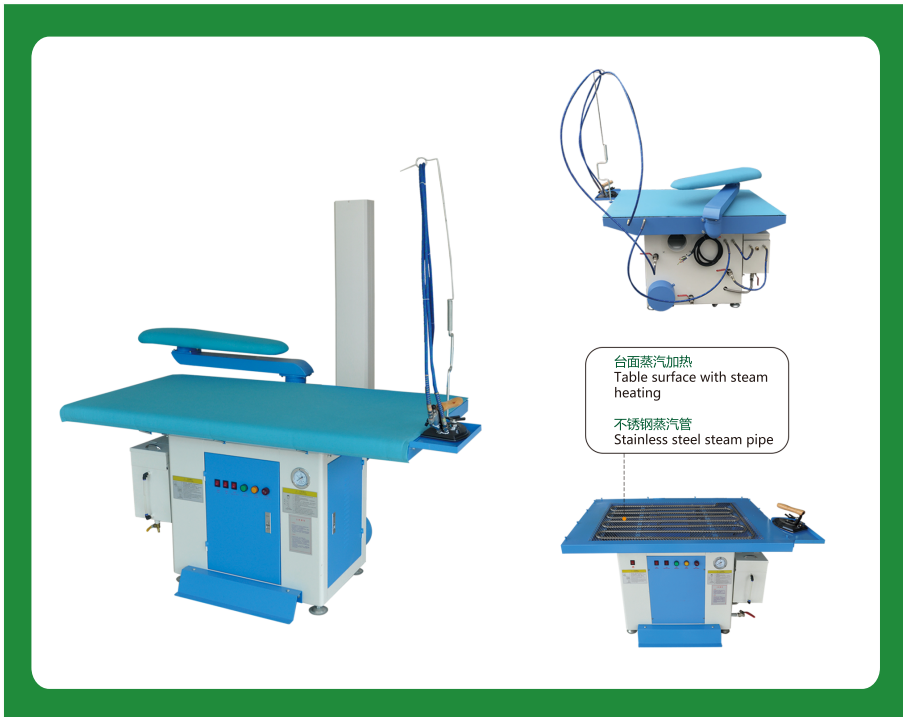

台面蒸汽加热
Table surface with steam heating
不锈钢蒸汽管
Stainless steel steam pipe

ENERGY SAVING
ENVIRONMENTAL PROTECTION
HIGH EFFICIENCY

节能 | 环保 | 高效

类型 Type	独家优势 Exclusive Advantage	每小时平均用电量 Average hourly electricity consumption
节能型 Energy saving type	蒸汽循环利用 Steam recycling using	~3.8kw
普通型 Normal type		~6.2kw

功能特点 FEATURE

- ① 一体化设计，一炉配一斗配置，自动控制加水加热，适用于不同规模的服装厂。
- ② 内置蒸汽炉胆，管道短、热损耗低，保持蒸汽温度和干燥。解决传统使用大锅炉集中供蒸汽道长，热损耗高，蒸汽水分大等弊端。
- ③ 节能型优点:独有的蒸汽循环利用结构,做到充分利用熨斗尾汽,比同类产品节省约40%蒸汽消耗量。
解决传统熨斗尾汽直接回到水箱的缺点:1.使水泵受热,缩短水泵寿命。
2.水箱里的水烧开产生的水蒸气不但会影响工作环境,而且会使旁边衣物容易受潮发霉。
- ④ 不锈钢炉胆,烫斗无污渍喷出,避免弄脏衣物。
- ⑤ 在不改变功率的情况下,把常规的发热管外部体积加大,炉体内部水的受热面积加大,实现受热快、起温快、汽量足。
- ⑥ 配备移动脚轮,可自由移动,方便工厂对生产流程的调整。

- Integrated design, one table with one steam iron, automatically control adding water and heating, Suitable for different scale garment factories.
- Inbuilt with steam furnace, short steam pipe and low heating loss, to keep steam temperature and dry. It solves the shortcomings of using traditional large boilers, long steam supply pipelines, high heating loss and steam with moisture.
- Energy-saving type advantages: The unique steam recycling structure, fully using iron end-steam, which saves about 40% steam consumption compared with other same type products.
Solve the shortcomings of traditional iron end-steam directly returning to the water tank:
1. Makes the water pump heating and shorten its life.
2. The vapor generated by the boiling water in the water tank will not only affect the working environment, but also make the garment next to the water tank will easily get moist and mold.
- Stainless steel furnace, steam without spot, to avoid making the clothes dirty.
- Without changing the heating pipe power, the external volume of the heating pipe is increased, the heat receiving area of the water inside the furnace is increased, so that the heating and heating temperature will be speed up, the steam volume is sufficient.
- Equipped with moving casters for conveniently moving.

技术参数		TECHNICAL SPECIFICATION	
型号	Model	节能型 Energy saving JY-128A-D-U	普通型 Normal type JY-128B-D-U
电压&频率&抽湿电机功率	Voltage&Frequency&Vacuum motor power	1PH AC220V/50Hz 0.8KW	3PH AC380V/50Hz 0.75KW
炉胆发热管功率	Furnace heating pipe power	5kw	
水泵功率	Water Pump Power	0.1Kw	1.1Kw
总功率	Total power	5.9KW/5.85KW	6.9KW/6.85KW
水箱容积	Water tank capacity	16L	
蒸汽压力	Steam pressure	0.4 Mpa	
蒸汽输出量	Steam output consumption	7kg/h	
台面加热	Table heating	蒸汽加热 (温度不可调: 80-100℃) Steam heating (Fixed temperature: 80-100℃)	
臂加热	Buck heater	选配 Option	
上排风槽	Upward chimney	选配 Option	
烫斗吊架	Iron hanger	选配 Option	
台面尺寸	Table size	1500*780mm	1200*780mm 可定制 Customized is available

机器可根据客户需求定做 Machine can be customized according to your requirements

机器可根据客户需求定做 Machine can be customized according to your requirements

一体化抽湿烫台系列 | VACUUM IRONING TABLE INBUILT WITH STEAM GENERATOR SERIES

SWEATER AND KNITWEAR IRONING TABLE SERIES | 羊毛衫、针织品烫台系列

一体化抽湿烫台：平面、单臂、双臂

Vacuum ironing table inbuilt with steam generator : Square table, With single buck, With double buck



ENERGY SAVING	JY-128A-F	JY-128A-D	JY-128A-DS
STANDARD	JY-128B-F	JY-128B-D	JY-128B-DS

一体化抽湿烫台(配风槽)：平面、单臂、双臂

Vacuum ironing table inbuilt with steam generator (with chimney) : Square table, With single buck, With double buck



ENERGY SAVING	JY-128A-F-U	JY-128A-D-U	JY-128A-DS-U
STANDARD	JY-128B-F-U	JY-128B-D-U	JY-128B-DS-U

一体化抽湿烫台(配风槽、烫斗吊架)：平面、单臂、双臂

Vacuum ironing table inbuilt with steam generator (with chimney and iron hanger) : Square table, With single buck, With double buck



ENERGY SAVING	JY-128A-F-T	JY-128A-D-T	JY-128A-DS-T
STANDARD	JY-128B-F-T	JY-128B-D-T	JY-128B-DS-T

机器可根据客户需求定做 Machine can be customized according to your requirements

AUTO SPRAYING STEAM SWEATER IRONING TABLE 自动喷蒸汽羊毛衫烫台

型号Model: JY-S-LB

内置锅炉

INBUILT WITH STEAM GENERATOR



型号Model: JY-S

普通款

NORMAL MODEL



型号Model: JY-S-LB-P

内置锅炉，配夹布加压装置

INBUILT WITH STEAM GENERATOR WITH CLAMPING PRESSURIZE DEVICE



型号Model: JY-S-P

配夹布加压装置

WITH CLAMPING PRESSURIZE DEVICE



功能特点 FEATURE

- ① 蒸汽自动喷射、抽吹风功能，使熨烫效果更自然、衣物保持柔软，并能节省人工、提高工作效率。
- ② 蒸汽喷射时间可根据不同衣物设置，使每件衣物达到最佳并且一致的熨烫效果。
- ③ 选配：气动夹布加压装置(使衣物更紧贴台面)
台面倾斜设计(易于操作)
内置蒸汽发生器(方便节能)
蒸汽烫斗(整理边角位置)

- Auto spraying steam , blowing and vacuum function , let the ironing effect more natural , keep the clothes soft , save labor and improve work efficiency .
- Steaming time can be set according to different clothes , to reach the best and consistent ironing effect .
- Optional: Pneumatic clamping pressurize device(makes the clothes more closely to the table top)
Incline Table (easy to operate)
Built-in steam generator (convenient and energy saving)
Steam iron (iron corner position)


适用于	SUITABLE FOR
羊毛衫、针织品	Sweaters and knitwear

技术参数	TECHNICAL SPECIFICATION		
电压&频率	Voltage&Frequency	1PH AC220V/50Hz 3PH AC380V/50Hz	
抽吹风电机功率	Blowing and vacuum motor power	0.775KW/0.825KW	
蒸汽消耗量	Steam Consumption	根据台面尺寸而定 According to the table size	
蒸汽压力	Steam pressure	0.4-0.5Mpa	
压缩空气压力	Compressed air pressure	0.5Mpa	
压缩空气流量	Compressed air consumption	1.5L/min	
台面尺寸	Table size	1500*900mm	1800*900mm 2100*1250mm

机器可根据客户需求定做 Machine can be customized according to your requirements

平面抽湿烫台系列 | SQUARE VACUUM IRONING TABLE SERIES

IRONING TABLE COMPOSITION SERIES | 烫台台面组成系列

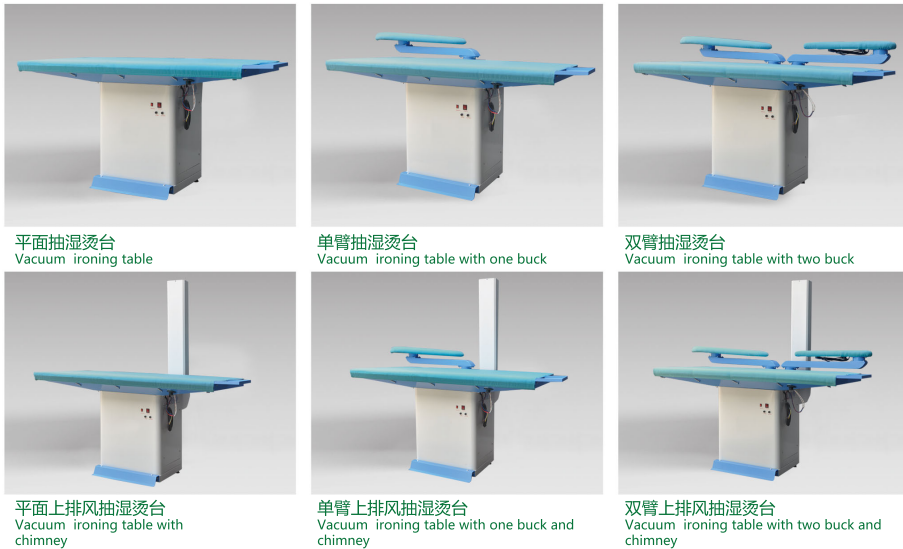

功能型号表	FUNCTION CODE DIAGRAM
JY-尺寸 - 平面(F) / 单臂(D) / 双臂(DS) (下排风 / 上排风U) - 电加热 (H) / 蒸汽加热 (SH) - 抽吹风(BV)	
JY-table size-square(F)/single buck(D)/double(DS) (Downward Exhaust /Upward chimney U) -Electric heater (H) /steam heater(SH)-blowing and vacuum(BV)	

技术参数		TECHNICAL SPECIFICATION						
型号 Model	电压&频率 抽湿电机功率 Voltage&frequency Vacuum motor power	电机转速 Vacuum motor power	台面电热功率 table heating	大臂加热 Big buck heating	电加热温度 Electric heating temperature	蒸汽加热温度 Steam heating temperature	台面尺寸 Table size	
JY-1200/1500/1800F	1PH AC220V 50Hz 0.8KW 3PH AC380V 50Hz 0.75KW	2800r/min					1200*780mm 1500*780mm 1800*900mm 可定制 Customized available	
JY-1200/1500/1800F-H			电加热 Electric heating		可调Adjustable 30-110°C			
JY-1200/1500/1800F-SH			蒸汽加热 Steam heating			80-100°C		
JY-1200/1500/1800D								
JY-1200/1500/1800D-H			电加热 Electric heating	电加热 Electric heating	可调Adjustable 30-110°C			
JY-1200/1500/1800D-SH			蒸汽加热 Steam heating			80-100°C		
JY-1200/1500/1800DS								
JY-1200/1500/1800DS-H			电加热 Electric heating	电加热 Electric heating	可调Adjustable 30-110°C			
JY-1200/1500/1800DS-SH			蒸汽加热 Steam heating			80-100°C		

功能特点 FEATURE



- ① 标配：强劲吸风、下排风罩
- ② 选配：低噪音型（抽湿电机功率&转速：0.55KW,1400R/MIN）
- ③ 选配：电加热（温度可调）、蒸汽加热（节能环保）、抽吹风功能（适用于西服）、上排风槽

- Standard configuration: Strong vacuum, downward exhaust cover
- Option: Low noise type(Vacuum motor pwer&speed: 0.55kw,1400r/min)
- Option: Electric heating(Temperature adjustable), Steam heating (Energy saving), Blowing and vacuum function(Best for suit), upward exhaust chimney.

机器可根据客户需求定做 Machine can be customized according to your requirements

平面&桥式烫台通用烫臂尺寸 Square & Bridge Ironing Table Universal Buck Size

通用大臂 Universal Big buck (mm) 通用小臂 Universal Small buck(mm)

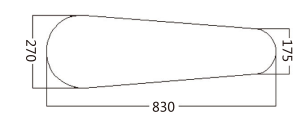

排风装置 EXHAUST WIND DEVICE



下排风：圆风罩
Downward exhaust:
Round cover



下排风：方形风罩
Downward exhaust:
Square cover




上排风：方形风槽
Upward exhaust:
Square chimney

机器可根据客户需求定做 Machine can be customized according to your requirements

大型平面抽湿烫台系列 | LARGE SIZE SQUARE VACUUM IRONING TABLE SERIES

BRIDGE VACUUM IRONING TABLE SERIES | 桥式抽湿烫台系列

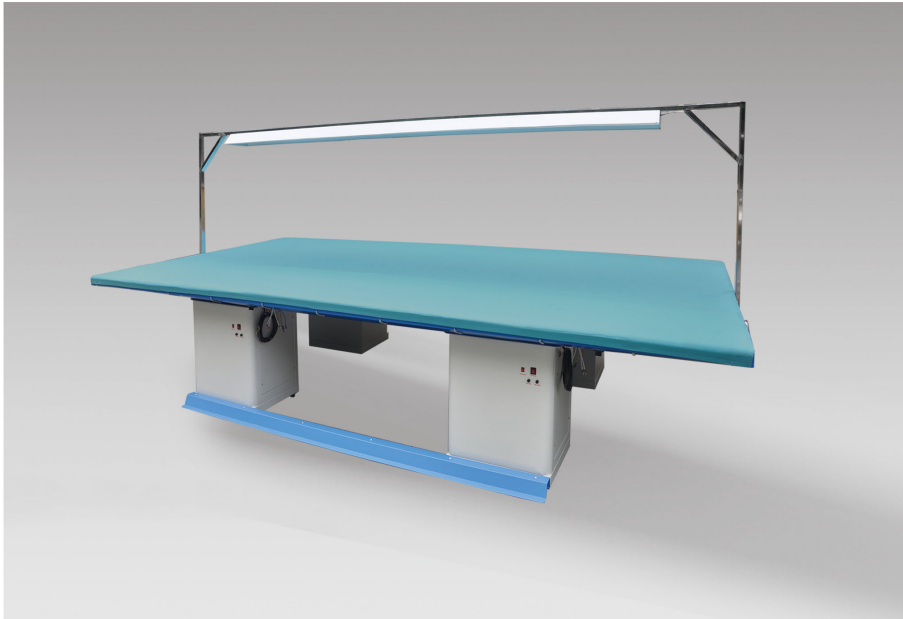

技术参数		TECHNICAL SPECIFICATION	
型号	Model	JY-3000F-H	
电压&频率	Voltage&Frequency	1PH AC220V/50Hz	3PH AC380V/50Hz
抽湿电机功率	Vacuum motor power	0.75KW/0.8KW*4	
电机转速	Motor speed	2800r/min	
台面电热功率	Table heating power	1Kw*4	
台面尺寸	Table size	3000*1500mm	

功能特点 FEATURE

- ① 台面带电加热，带灯管
- ② 适用于窗帘等大尺寸布料

- table with electric heating, with lamp.
- suitable for curtain and other large size fabric.

机器可根据客户需求定做 Machine can be customized according to your requirements



桥式抽湿烫台 (台面带电加热)

BRIDGE VACUUM IRONING TABLE (TABLE WITH ELECTRIC HEATING)

型号 MODEL :2TTBP18-AC




桥式抽湿烫台 (台面带电加热)

BRIDGE VACUUM IRONING TABLE (TABLE WITH ELECTRIC HEATING)

型号 MODEL :2TTBP18-AB

桥台面尺寸 BRIDGE TABLE SIZE

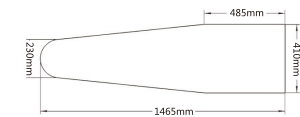

功能特点 FEATURE

- ① 吸风强劲
- ② 选配：吹风功能 (适用于西服)


- Strong vacuum.
- Option: Blowing function (Best for suit)

技术参数		TECHNICAL SPECIFICATION	
电压&频率	Voltage&Frequency	1PH AC220V/50Hz	3PH AC380V/50Hz
抽湿电机功率	Vacuum motor power	0.75KW/0.8KW	
电机转速	Motor speed	2800r/min	
台面电热功率	Table heating power	0.5Kw	
总功率	Total power	1.25/1.3Kw	
台面电加热温度	Electric heating temperature	可调Adjustable , 30-110°C	
台面吸风压强	Table vacuum pressure	400-500Pa	
臂吸风压强	Buck vacuum pressure	200-400Pa	

机器可根据客户需求定做 Machine can be customized according to your requirements

一体化桥式抽湿熨台系列 | BRIDGE VACUUM IRONING TABLE INBUILT WITH STEAM GENERATOR SERIES

SPECIAL BUCK VACUUM IRONING TABLE SERIES | 特制模具抽湿熨台系列

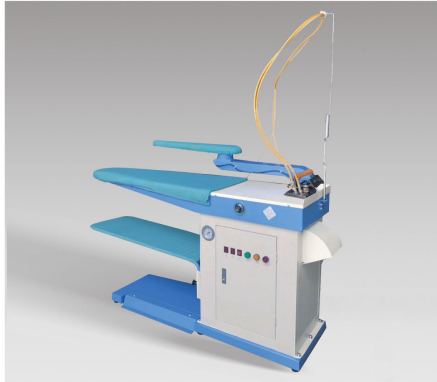

一体化桥式抽湿熨台

配备：全蒸汽烫斗、原子喉、原子喉吊架

Bridge vacuum ironing table inbuilt with steam generator
Equipped with :full steam iron, iron hose, iron hose hanger

型号 :2TTBP18-AQ




一体化桥式抽湿熨台

配备：全蒸汽烫斗、原子喉、烫斗吊架、灯管、上排风槽

Bridge vacuum ironing table inbuilt with steam generator
Equipped with:full steam iron, iron hose, iron hanger, Lamp, Chimney

型号:2TTBP18-JQ

桥台面尺寸(MM) BRIDGE TABLE SIZE

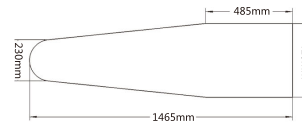

功能特点 FEATURE

- ① 一体化设计，一炉配一斗配置，自动控制加水加热
- ② 台面电加热，保持台面干燥

- Integrated design, one table with one steam iron, automatically control adding water and heating.
- Electric heating in the table surface, to keep the table surface dry.


技术参数	TECHNICAL SPECIFICATION		
电压&频率	Voltage&Frequency	1PH AC220V/50Hz	3PH AC380V/50Hz
抽湿电机功率	Vacuum Motor power	0.75KW/0.8KW	
炉胆发热管功率	Furnace heating pipe power	5kw	
水泵功率	Water pump Power	1.1Kw	
台面电热功率	Table heating power	0.5Kw	
总功率	Total power	7.35/7.4Kw	
台面电加热温度	Electric heating temperature	可调Adjustable, 30-110°C	

机器可根据客户需求定做 Machine can be customized according to your requirements




① 袖子抽湿熨台
Sleeve vacuum ironing table

型号 MODEL :2TTBPXZ



② 双开开裤缝抽湿熨台
Double trousers seam vacuum ironing table

型号 MODEL :MODEL :2TTBPKU-2




③ 开裤缝抽湿熨台(带电加热)
Trousers seam vacuum ironing table (With electric heating)

型号 MODEL :2TTBPKU



④ 裤腰抽湿熨台(带电加热)
Waist of trousers vacuum ironing table
型号 MODEL 2TTBPKY



功能特点 FEATURE

- ① 吸风强劲
- ② 选配：吹风功能（适用于西服）
- ③ 选配：上排风槽

- Strong vacuum.
- Option:Blowing function(Best for suit)
- Option: Chimney

技术参数	TECHNICAL SPECIFICATION		
电压&频率	Voltage&Frequency	1PH AC220V/50Hz	3PH AC380V/50Hz
抽湿电机功率	Vacuum motor power	0.75KW/0.8KW	
电机转速	Motor speed	2800r/min	
电热功率	Electric heating power	0.5Kw	

机器可根据客户需求定做 Machine can be customized according to your requirements

特制模具抽湿烫台系列 | SPECIAL BUCK VACUUM IRONING TABLE SERIES

SPOT REMOVING MACHINE SERIES | 除渍台系列



5
开袖肩抽湿烫台
Shoulder seam vacuum ironing table

型号 MODEL :JY-BUCK-5



6
开肩抽湿烫台
Shoulder seam vacuum ironing table

型号 MODEL :JY-BUCK-6



7
开领抽湿烫台
Collar seam vacuum ironing table

型号 MODEL :JY-BUCK-7



8
前衣领抽湿烫台
Front collar vacuum ironing table

型号 MODEL :JY-BUCK-8



9
内外袖抽湿烫台
Inner and outer sleeves vacuum ironing table

型号 MODEL :JY-BUCK-9



10
上弯袖抽湿烫台
Upper sleeve vacuum ironing table

型号 MODEL :JY-BUCK-10



11
上衣侧缝抽湿烫台
Top seam vacuum ironing table

型号 MODEL :JY-BUCK-11



12
开侧缝烫台
Open side seam vacuum ironing table

型号 MODEL :JY-BUCK-12

技术参数	TECHNICAL SPECIFICATION		
电压&频率	Voltage&Frequency	1PH AC220V/50Hz	3PH AC380V/50Hz
抽湿电机功率	Vacuum motor power	0.75KW/0.8KW	
电机转速	Motor speed	2800r/min	

选配	OPTION
抽吹风功能、上排风槽	Blowing and vacuum function, Chimney

机器可根据客户需求定做 Machine can be customized according to your requirements



功能特点 FEATURE

- ① 不锈钢工作面,内置吸风装置
- ② 需要外接蒸汽发生器和压缩空气机 (JY-A)
- ③ 适用于各类成衣去污

- Worktable is made by stainless steel, inbuilt with suction device.
- Need connect with steam generator and air compressor. (JY-A)
- Suitable for remove spot of the finished garment.

	MAIN CONFIGURATION						
型号 Model	除渍药水枪 Solution gun	溶液瓶 Solution bottle	蒸汽&热风枪 Steam & Hot air gun	抽风功能 Suction function	吹风功能 Blowing function	灯管 Lamp	工作台电加热 Worktable with electric heater
JY-A	两支 Two	两个 Two	✓	✓		✓	
JY-B				✓	✓		✓

	TECHNICAL SPECIFICATION						
型号 Model	电压 Voltage	吸风电机功率 Suction Motor power	外接蒸汽压力 External steam pressure	外接气压 External air pressure	吸风压强 Suction pressure	工作台高度 Working table height	外形尺寸(长*宽*高) Dimensions(L*W*H)
JY-A	1PH 220V 50HZ	0.8KW	0.5MPa	0.6MPa	600Pa	980mm	1160*440*1980mm
JY-B	3PH 380V 50HZ						1600*580*1980mm

机器可根据客户需求定做 Machine can be customized according to your requirements